


CD 294 BW Series



4000 at 105°C

- Standard 105°C
- General Industry



Item	Characteristics	
Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	16 ~ 100	160 ~ 500
Capacitance Range (µF)	39 ~ 47 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	
Leakage Current (µA)	After 5 minutes at 20°C application of rated voltage, leakage current is not more than 0,01CV or 1,5mA, whichever is smaller C: Nominal Capacitance (µF) V: Rated Voltage (V)	
Dissipation Factor (20°C, 120Hz)	Rated Voltage (V)	16 25 35 50 63~100 160~400 450~500
	Tan δ (max)	0,50 0,40 0,35 0,30 0,20 0,15 0,20
Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	16~100 160~200 250~500
	$Z_{-25^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	4
	$Z_{-40^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	15 -


	Useful Life		Load Life	Endurance Test	Shelf Life
Lifetime	4 000h	>180 000h	2000h	3000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacity Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature Failure Rate Level	U_R I_R 105°C ≤ 1% Failure Rate	U_R $1,4 \times I_R$ 40°C ≤ 1% Failure Rate	U_R I_R 105°C guaranteed	U_R $I_R = 0$ 105°C	$U_R = 0$ $I_R = 0$ 105°C After test: U_R to be applied for 30min >24h before measurement

Multiplier for Ripple Current

Frequency Coefficient

Frequency	50Hz	120Hz	1kHz	10kHz	20kHz	100kHz
Rated Voltage (V)						
≤ 100	0,95	1,00	1,10	1,15	1,15	1,20
160 ~ 250	0,87	1,00	1,11	1,18	1,20	1,40
≥ 350	0,80	1,00	1,14	1,14	1,20	1,65

Lifetime Diagram

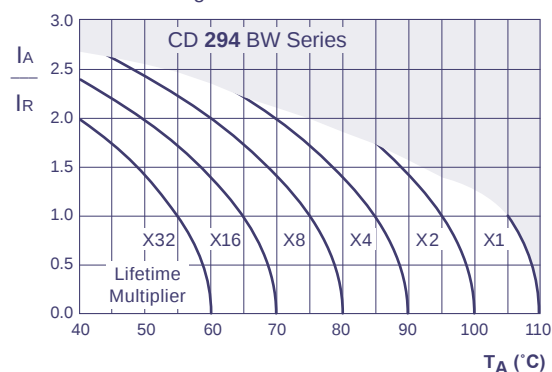

I_A = actual ripple current at 120Hz, I_R = rated ripple current at 120Hz, 105°C
Multiplier of Useful Life as a function of ambient temperature and ripple current load

V _{DC} (Surge Voltage) Code	Rated Capa- citance	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Max Ripple Current 105°C, 120Hz	Size Ø D x L
(V)	(µF)	(mΩ)	(mΩ)	(Arms)	(mm)
16 (20) 1C	6800	98	69	1,60	22 x 25
	10000	67	47	1,99	22 x 30
		67	47	1,99	25 x 25
	12000	56	39	2,28	22 x 35
		56	39	2,30	25 x 30
		56	39	2,38	30 x 25
	15000	45	31	2,64	22 x 40
		45	31	2,68	25 x 35
	18000	37	26	2,98	22 x 45
		37	26	3,04	25 x 40
		37	26	3,00	30 x 30
		37	26	3,10	35 x 25
		31	22	3,40	25 x 45
	22000	31	22	3,39	30 x 35
		25	18	3,81	25 x 50
		25	18	3,83	30 x 40
	27000	25	18	3,74	35 x 30
		21	15	4,30	30 x 45
		21	15	4,24	35 x 35
	39000	18	12	4,74	30 x 50
		18	12	4,72	35 x 40
	47000	15	10	5,27	35 x 45
25 (32) 1E	4700	113	80	1,55	22 x 25
	6800	79	55	1,91	22 x 30
		79	55	1,91	25 x 25
	8200	65	46	2,14	22 x 35
		65	46	2,16	25 x 30
		65	46	2,25	30 x 25
	10000	54	38	2,40	22 x 40
		54	38	2,44	25 x 35
	12000	45	31	2,69	22 x 45
		45	31	2,74	25 x 40
		45	31	2,70	30 x 30
		45	31	2,80	35 x 25
	15000	36	25	3,15	25 x 45
		36	25	3,13	30 x 35
		36	25	3,22	35 x 30
	18000	30	21	3,54	25 x 50
		30	21	3,54	30 x 40
35 (44) 1V	22000	25	17	4,24	30 x 45
		25	17	3,96	35 x 35
		20	14	4,75	35 x 45
	33000	17	12	5,39	35 x 50
	3300	141	99	1,43	22 x 25
	3900	120	84	1,65	22 x 30
	4700	99	70	1,78	25 x 25
	5600	83	59	2,02	22 x 35
		83	59	2,04	25 x 30
		83	59	2,12	30 x 25
	6800	69	48	2,28	22 x 40
		69	48	2,31	25 x 35
		57	40	2,67	22 x 50
	8200	57	40	2,60	25 x 40
		57	40	2,56	30 x 30
		57	40	2,78	35 x 25
50 (63) 1H	10000	47	33	2,92	25 x 45
		47	33	2,92	30 x 35
		39	28	3,26	25 x 50
	12000	39	28	3,28	30 x 40
		39	28	3,20	35 x 30
		31	22	3,74	30 x 45
	15000	31	22	3,69	35 x 35
		26	19	4,16	35 x 40
		22	15	4,92	35 x 50
	18000	22	15	4,92	35 x 50
		1800	222	1,31	22 x 25
		2200	181	1,27	22 x 30
	2700	148	104	1,70	22 x 30
		148	104	1,70	25 x 25
		121	85	1,98	22 x 35
	3300	121	85	2,00	25 x 30
		103	72	2,25	22 x 40
	3900	103	72	2,28	25 x 35
		103	72	2,22	30 x 25
		85	60	2,56	22 x 45
	4700	85	60	2,58	30 x 30
		85	60	2,67	35 x 25
		72	50	2,89	22 x 50
	5600	72	50	2,81	25 x 40
		72	50	2,95	30 x 35
		59	41	3,37	25 x 50
	6800	59	41	3,39	30 x 40
		59	41	3,31	35 x 30

V _{DC} (Surge Voltage) Code	Rated Capa- citance	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Max Ripple Current 105°C, 120Hz	Size Ø D x L	
(V)	(µF)	(mΩ)	(mΩ)	(Arms)	(mm)	
50 (63) 1H	8200	49	34	3,71	30 x 45	
		49	34	3,66	35 x 35	
	10000	40	28	4,09	30 x 50	
		40	28	4,07	35 x 40	
	12000	34	24	4,50	35 x 45	
63 (79) 1J	1200	222	155	1,25	22 x 25	
	1800	148	104	1,52	22 x 30	
		148	104	1,52	25 x 25	
	2200	121	85	1,73	22 x 35	
		121	85	1,75	25 x 30	
	2700	99	69	1,97	22 x 40	
		99	69	1,99	25 x 35	
		99	69	1,93	30 x 25	
	3300	81	57	2,32	22 x 50	
		81	57	2,27	25 x 40	
		81	57	2,24	30 x 30	
		81	57	2,41	35 x 25	
	3900	68	48	2,54	25 x 45	
		68	48	2,55	30 x 35	
	4700	57	40	2,88	25 x 50	
		57	40	2,90	30 x 40	
		57	40	2,83	35 x 30	
	5600	48	34	3,28	30 x 45	
		48	34	3,24	35 x 35	
		40	28	3,73	30 x 50	
	6800	40	28	3,71	35 x 40	
		33	23	4,16	35 x 45	
	10000	27	19	4,69	35 x 50	
	80 (100) 1K	820	324	227	1,11	22 x 25
		1000	266	186	1,25	22 x 25
1200		222	155	1,39	22 x 30	
		222	155	1,39	25 x 25	
1500		177	124	1,61	22 x 35	
		177	124	1,62	25 x 30	
1800		148	104	1,83	22 x 40	
		148	104	1,81	30 x 25	
2200		121	85	2,09	22 x 45	
		121	85	2,01	25 x 35	
		121	85	2,10	30 x 30	
		121	85	2,17	35 x 25	
2700		99	69	2,43	25 x 45	
		99	69	2,43	30 x 35	
3300		81	57	2,76	25 x 50	
		81	57	2,78	30 x 40	
		81	57	2,71	35 x 30	
3900		69	48	3,12	30 x 45	
		69	48	3,07	35 x 35	
4700		57	40	3,56	30 x 50	
		57	40	3,50	35 x 40	
		48	34	3,87	35 x 45	
6800		40	28	4,19	35 x 50	
100 (125) 2A		560	474	332	1,07	22 x 25
		820	324	227	1,35	22 x 30
	324		227	1,35	25 x 25	
	1000	266	186	1,54	22 x 35	
		266	186	1,56	25 x 30	
	1200	222	155	1,74	22 x 40	
		222	155	1,76	25 x 35	
		222	155	1,71	30 x 25	
	1500	177	124	1,99	22 x 45	
		177	124	2,03	25 x 40	
		177	124	2,00	30 x 30	
		177	124	2,07	35 x 25	
	1800	148	104	2,28	25 x 45	
		148	104	2,27	30 x 35	
	2200	121	85	2,57	25 x 50	
		121	85	2,59	30 x 40	
		121	85	2,52	35 x 30	
	2700	99	69	2,94	30 x 45	
		99	69	2,90	35 x 35	
	3300	81	57	3,32	30 x 50	
		81	57	3,31	35 x 40	
		69	48	3,69	35 x 45	
	4700	57	40	4,14	35 x 50	
	160 (200) 2C	330	603	423	1,16	22 x 25
		390	511	358	1,43	22 x 30
470		424	297	1,52	22 x 35	
		424	297	1,55	25 x 25	
560		356	249	1,62	22 x 40	
		356	249	1,73	25 x 30	

Custom products are available on request.

Ratings for CD 294 BW Series

V _{DC} (Surge Voltage) Code	Rated Capacitance	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Max Ripple Current 105°C, 120Hz	Size Ø D x L
(V)	(µF)	(mΩ)	(mΩ)	(Arms)	(mm)
160 (200) 2C	680	293	205	1,70	22 x 45
		293	205	1,81	25 x 35
		293	205	1,82	30 x 25
	820	243	170	1,81	22 x 50
		243	170	1,98	25 x 40
		243	170	1,98	30 x 30
		243	170	1,93	35 x 25
	1000	199	140	2,04	25 x 45
		199	140	2,14	30 x 35
	1200	166	117	2,12	25 x 50
		166	117	2,22	30 x 40
		166	117	2,40	35 x 30
	1500	133	93	2,46	30 x 45
		133	93	2,53	35 x 35
	1800	111	78	2,98	35 x 45
	2200	91	64	3,10	35 x 50
180 (225) 2K	270	737	516	1,08	22 x 25
	330	603	423	1,30	22 x 30
	390	511	358	1,35	25 x 25
	470	424	297	1,50	22 x 35
		424	297	1,62	25 x 30
	560	356	249	1,62	22 x 40
		356	249	1,69	25 x 35
		356	249	1,67	30 x 25
	680	293	205	1,76	22 x 50
		293	205	1,72	25 x 40
		293	205	1,74	30 x 30
		293	205	1,92	35 x 25
	820	243	170	1,78	25 x 45
		243	170	1,85	30 x 35
	1000	199	140	1,91	25 x 50
		199	140	2,01	30 x 40
		199	140	2,16	35 x 30
	1200	166	117	2,19	30 x 45
		166	117	2,34	35 x 35
	1500	133	93	2,36	30 x 50
		133	93	2,56	35 x 40
	1800	111	78	2,67	35 x 45
200 (250) 2D	220	905	634	1,08	22 x 25
	270	737	516	1,20	22 x 30
	330	603	423	1,30	22 x 30
		603	423	1,35	25 x 25
	390	511	358	1,41	22 x 35
	470	424	297	1,50	22 x 40
		424	297	1,47	25 x 30
	560	424	297	1,56	30 x 25
		356	249	1,58	22 x 45
		356	249	1,65	25 x 35
	680	293	205	1,68	22 x 50
		293	205	1,80	25 x 40
		293	205	1,82	30 x 30
		293	205	1,96	35 x 25
	820	243	170	1,87	25 x 50
		243	170	1,99	30 x 35
		243	170	2,07	35 x 30
	1000	199	140	2,17	30 x 45
		199	140	2,22	35 x 35
	1200	166	117	2,22	30 x 50
		166	117	2,42	35 x 40
	1500	133	93	2,59	35 x 45
	1800	111	78	2,70	35 x 50
250 (300) 2E	180	1106	774	0,94	22 x 25
	220	905	634	1,10	22 x 30
		905	634	1,15	25 x 25
	270	737	516	1,13	22 x 35
	330	603	423	1,20	22 x 40
		603	423	1,30	25 x 30
		603	423	1,30	30 x 25
	390	511	358	1,26	22 x 45
		511	358	1,41	25 x 35
	470	424	297	1,37	22 x 50
		424	297	1,52	25 x 40
		424	297	1,36	30 x 30
		424	297	1,40	35 x 25
	560	356	249	1,59	25 x 45
		356	249	1,57	30 x 35
	680	293	205	1,56	35 x 30
		293	205	1,66	25 x 50
	820	243	170	1,76	30 x 40
		243	170	1,83	30 x 45
	1000	199	140	1,82	35 x 35
		199	140	1,87	30 x 50
	1200	166	117	1,99	35 x 40
	1200	166	117	2,10	35 x 45

V _{DC} (Surge Voltage) Code	Rated Capacitance	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Max Ripple Current 105°C, 120Hz	Size Ø D x L
(V)	(µF)	(mΩ)	(mΩ)	(Arms)	(mm)
350 (400) 2V	68	2926	1610	0,56	22 x 25
		1990	1095	0,70	22 x 30
	100	1990	1095	0,70	25 x 25
		1658	912	0,73	22 x 35
	150	1327	730	0,79	22 x 40
		1327	730	0,82	25 x 30
		1327	730	0,82	30 x 25
		1106	608	0,81	22 x 45
	180	1106	608	0,89	25 x 35
		1106	608	0,90	30 x 30
		905	498	0,93	22 x 50
	220	905	498	0,97	25 x 40
		905	498	0,98	35 x 25
		737	406	1,01	25 x 50
	270	737	406	1,05	30 x 35
		737	406	1,01	35 x 30
	330	603	332	1,16	30 x 45
		603	332	1,16	35 x 35
400 (450) 2G	390	511	281	1,26	30 x 50
		511	281	1,26	35 x 40
	470	424	233	1,35	35 x 45
	560	356	196	1,51	35 x 50
	68	2926	1522	0,47	22 x 25
		2427	1262	0,56	22 x 30
		82	2427	0,65	25 x 25
		100	1990	0,60	22 x 30
	120	1658	863	0,64	22 x 35
		1658	863	0,70	25 x 30
		1658	863	0,78	30 x 25
	150	1327	690	0,70	22 x 40
		1327	690	0,73	25 x 35
	180	1106	575	0,78	22 x 50
		1106	575	0,82	25 x 40
		1106	575	0,83	30 x 30
		1106	575	0,86	35 x 25
	220	905	471	0,87	25 x 45
		905	471	0,86	30 x 35
	270	737	384	0,94	25 x 50
		737	384	0,95	30 x 40
		737	384	0,91	35 x 30
	330	603	314	1,11	30 x 45
		603	314	1,13	35 x 35
	390	511	266	1,15	30 x 50
450 (500) 2W	470	511	266	1,26	35 x 40
		424	221	1,31	35 x 45
	560	356	185	1,50	35 x 50
	56	4737	2369	0,47	22 x 25
	68	3903	1951	0,56	22 x 30
		3903	1951	0,65	25 x 25
		82	3236	0,64	22 x 35
	100	2653	1327	0,70	22 x 40
		2653	1327	0,70	25 x 30
		2653	1327	0,78	30 x 25
		2211	1106	0,73	22 x 45
	120	2211	1106	0,73	25 x 35
		1769	885	0,78	22 x 50
		1769	885	0,82	25 x 40
	150	1769	885	0,83	30 x 30
		1769	885	0,86	35 x 25
		1474	737	0,87	25 x 45
	180	1474	737	0,86	30 x 35
		1206	603	0,94	25 x 50
500 (550) 2H	220	1206	603	0,95	30 x 40
		1206	603	0,91	35 x 30
		983	492	1,11	30 x 45
	270	983	492	1,13	35 x 35
		804	402	1,15	30 x 50
	330	804	402	1,26	35 x 40
		681	341	1,31	35 x 45
	390	565	283	1,50	35 x 50
	470	39	6802	0,35	22 x 30
		47	5644	0,41	22 x 35
		56	4737	0,47	22 x 40
		68	3901	0,54	22 x 45
	82	3235	1618	0,62	25 x 40
		2653	1327	0,67	25 x 45
		100	2211	0,77	25 x 50
	120	2211	1106	0,72	35 x 30
		1769	885	0,85	30 x 40
	150	1474	737	1,01	30 x 50
		1206	603	1,12	35 x 45
	270	983	492	1,29	35 x 50

Custom products are available on request.

Part Number System



Order Code **SMD, Radial, Snap-In**

EC	R	1C	PT	101	M	FF	25	0611	JExxxxx
Technology	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code (in μF)	Capacitance Tolerance	Lead Form	Terminal/Pitch Size	Dimension	for Specials only
EC = Electrolytic Capacitor	SMD = V	For coding please refer to the pages of ratings	CD VS = BS	0,47 = R47	$\pm 20\%$ = M	SMD:		4x7 = 0407	
	Radial = R		CD VH = VH	1,0 = 010	$\pm 10\%$ = K	Taped = FF	Terminal = T2	5x11,5 = 0511	
PC = Polymer Capacitor	Snap-In = S		CD VZ = VZ	2,2 = 2R2	+30 / -10% = Q	Radial:		6,3x11,5 = 0611	
			CD 261 = LK	100 = 101	+50 / -10% = T	Long Lead = LL	2,0mm = 20	35x80 = 3580	
			CD 261X = QX	1000 = 102		Cut 5,0mm = CB	2,5mm = 25	45x100 = 45100	
			CD 262 = QM	10000 = 103		Cut 4,5mm = CC	3,5mm = 35		
			CD 263 = BK			Cut 4,0mm = CD	5,0mm = 50		
			CD 269 = PH			Cut 3,5mm = CE	7,5mm = 75		
			CD 281 = LL			Cut 3,0mm = CF	10,0mm = 10		
			CD 284 = XY			on request: alternative lead forms (axial, 90° - angle, others)		12,5mm = 12	
			CD 287 = GC						
			CD 28L = QL						
			CD 293 = BZ						
			CD 294 = BW						
			CD 295 = BC						
			CD 296 = KC						
			CD 297 = BB						
			CD 299 = PG						
			CD 29D = HR						
			CD 29H = QH						
			CD 29L = QL						
			HCP = CP						
			HPM = PM						
			HVC = VC						


Snap-In:

4,0mm Pin Length = T4	2 Pin = P2
6,3mm Pin Length = T6	3 Pin = P3
Soldering Pin = S4	4 Pin = P4
	5 Pin = P5

preferred

Technical Specification **SMD Type**

Dimensions

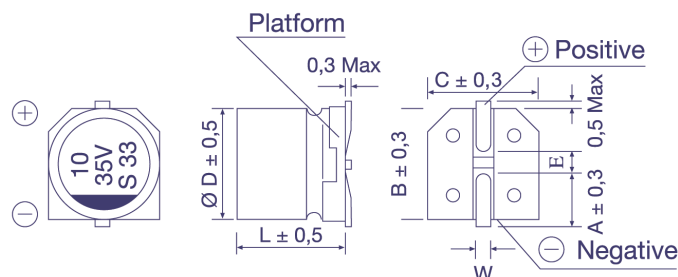


$\emptyset D \times L$	4x5,4	5x5,4	6,3x5,4	6,3x7,7	8x10,5	8x11,8	10x10,5	10x12,7
A	1,8	2,1	2,4	2,5	2,9	2,9	3,2	3,2
B	4,3	5,3	6,6	6,6	8,3	8,4	10,3	10,4
C	4,3	5,3	6,6	6,6	8,3	8,4	10,3	10,4
E	1,0	1,3	2,2	2,2	3,1	3,1	4,5	4,5
L	5,4	5,4	5,4	7,7	10,5	11,8	10,5	12,7
W	0,5 - 0,8				0,7 - 1,1			

in mm

Taping Dimensions

Unit:mm

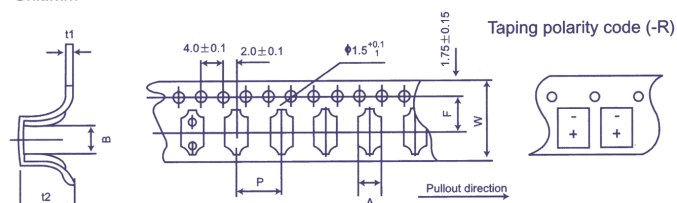


Taping polarity code (-R)

Size (DxL)	w $\pm 0,3$	A $\pm 0,2$	B $\pm 0,2$	P $\pm 0,1$	t2 $\pm 0,2$	F $\pm 0,1$	t1 $\pm 0,1$
4 x 5,4	12,0	5,0	5,0	8,0	5,8	5,5	0,4
5 x 5,4	12,0	6,0	6,0	12,0	5,8	5,5	0,4
6,3 x 5,4	16,0	7,0	7,0	12,0	5,8	7,5	0,4
6,3 x 7,7	16,0	7,0	7,0	12,0	8,4	7,5	0,4
8 x 10,5	24,0	8,7	8,7	16,0	11,0	11,5	0,5
8 x 11,8	24,0	8,7	8,7	16,0	12,3	11,5	0,5
10 x 10,5	24,0	10,7	10,7	16,0	11,0	11,5	0,5
10 x 12,7	24,0	10,7	10,7	16,0	14,0	11,5	0,5

in mm

Soldering Profile (Aluminium Electrolytic Capacitors)

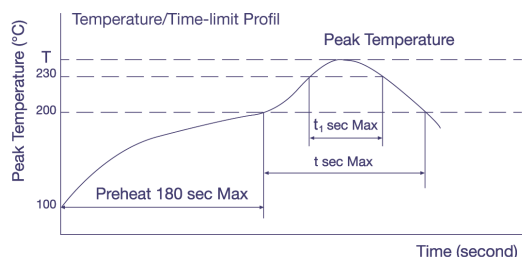


Allowable Range of Peak Temperature

Size	T (°C)	t (second)	t ₁ (second)
$\emptyset 4 \sim 6,3$	250	90	40
$\emptyset 8 \times 10,5$	240	90	30
$\emptyset 10 \times 10,5$	235	60	30

Diameter	w	D
4; 5	14 $\pm$ 1	50 $\pm$ 1
6,3	18 $\pm$ 1	50 $\pm$ 1
8; 10	25 $\pm$ 1	50 $\pm$ 1
Polymer	25 $\pm$ 1	80 $\pm$ 1


in mm



For more details or Soldering Profiles of Radials or Polymer-Capacitors please contact our local Sales Offices.


Technical Specification **Snap-In Type**

Pin Type: Snap-In
Order Code: T6, T4

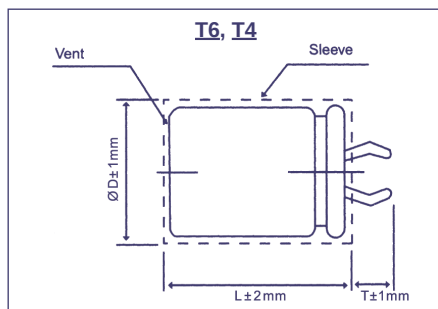


Terminal	T6	T4
Pin Length T	6,3	4,0

Pin Type: Soldering
Order Code: S4

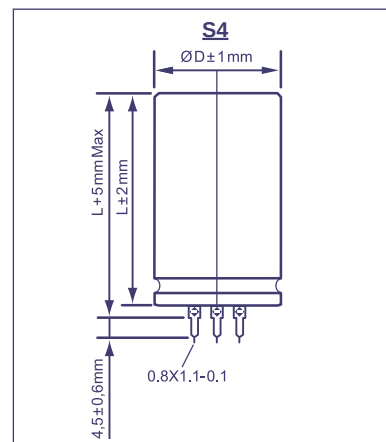


Snap-In Terminal
Order Code: P2, P3, P4

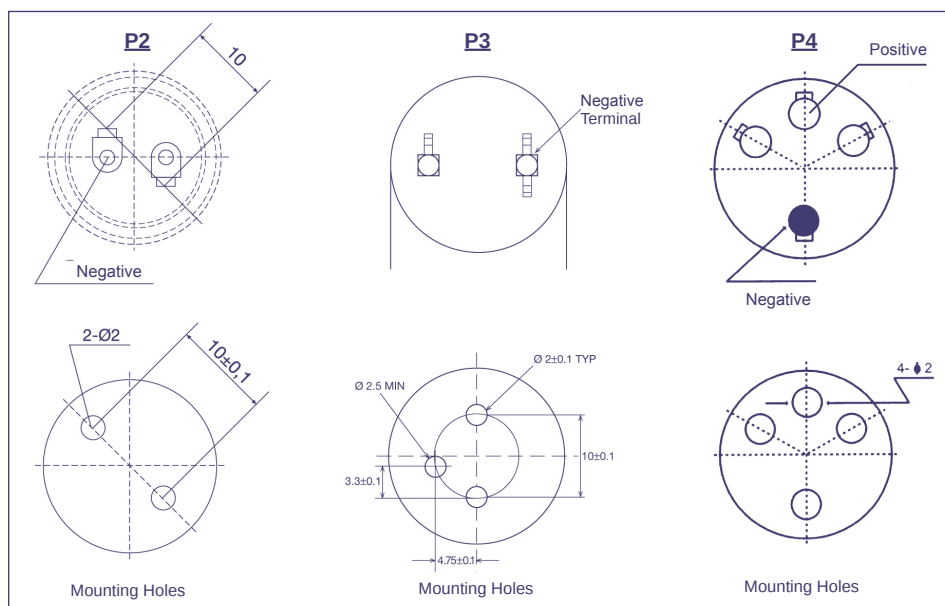

P3 only T4 Terminal

Soldering Terminal
Order Code: P5

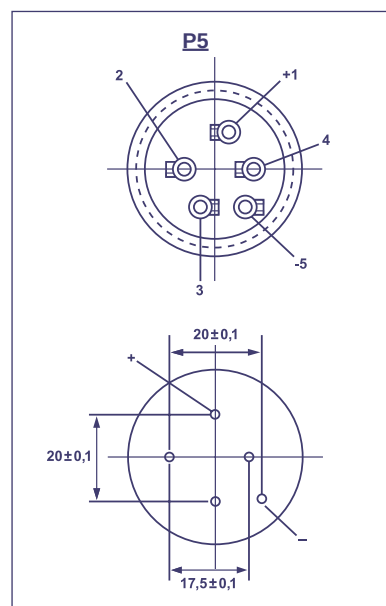

Order Code **Screw Type**



EC	G	1C	BP	101	M	B	E	160	A361	JExxxxx
Technology	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code	Capacitance Tolerance	Mounting	Diameter	Length	For Terminal Code see tables below	for Specials only
EC = Electrolytic Capacitor	Screw = G	For coding please refer to the pages of ratings	CD 135 = BP	100 = 101	±20% = M	Bolt = B	36 = A	53 = 053		
			CD 136 = PK	1000 = 102	±10% = K	No double sleeve = N	40 = B	65 = 065		
			CD 137 = PX	10000 = 103	+30 / -10% = Q	2 stoppers bracket+double sleeve* = I	51 = C	96 = 096		
			CD 138 = PC		+20 / -0% = R	3 stoppers bracket+double sleeve* = Y	64 = D	100 = 100		
			CD 139 = BL		+50 / -10% = T	No bracket, but double sleeve* = D	77 = E	115 = 115		
					preferred	* Double sleeve for diameter ≥ 51 only	90 = F	236 = 236		
							101 = G			

Technical Specification **Screw Type**

Dimensions


Standard Housing

Order Code: I, Y, D, N



Bolt Housing

Order Code: B



Ø D	Ø d	l
Ø 36	M8	12
≥ Ø 51	M12	16

in mm